


## DVP Supply air valve

For systems with low air flows.

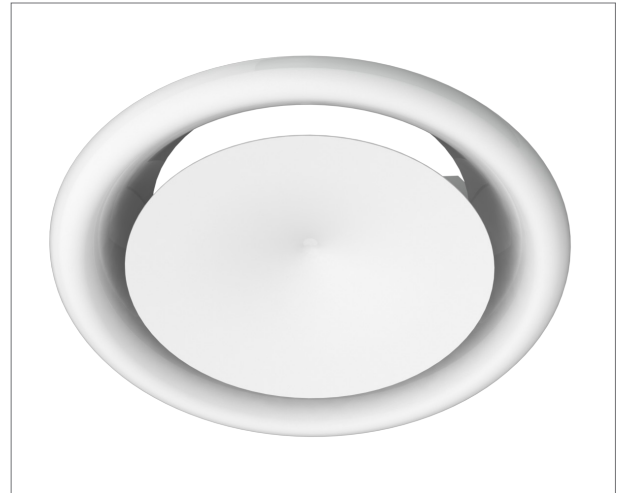


### Structure and dimensions



Manufactured of galvanized steel and coated white (RAL 9010).

The vent body includes an elastic foam seal.

| Size | ØA  | ØB  | ØC  | ØE  | L  | L1 | Weight, kg |
|------|-----|-----|-----|-----|----|----|------------|
| 100  | 98  | 125 | 92  | 137 | 40 | 45 | 0,12       |
| 125  | 123 | 150 | 115 | 164 | 45 | 45 | 0,3        |
| 160  | 159 | 185 | 148 | 212 | 55 | 45 | 0,4        |
| 200  | 198 | 225 | 188 | 248 | 60 | 45 | 0,5        |
| 250  | 248 | 290 | 240 | 300 | 70 | 45 | 1,2        |



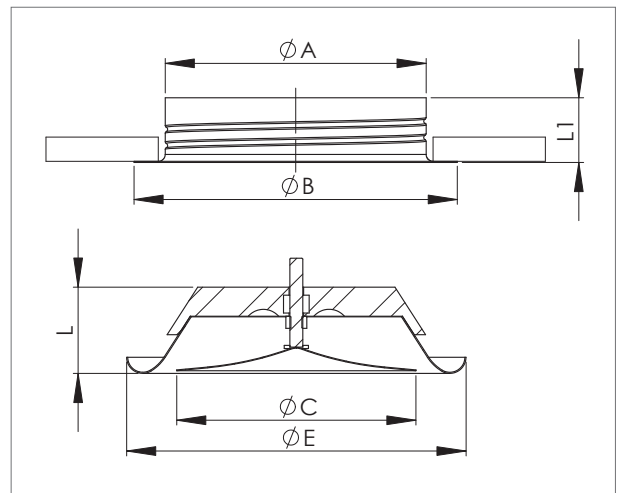


### Technical data

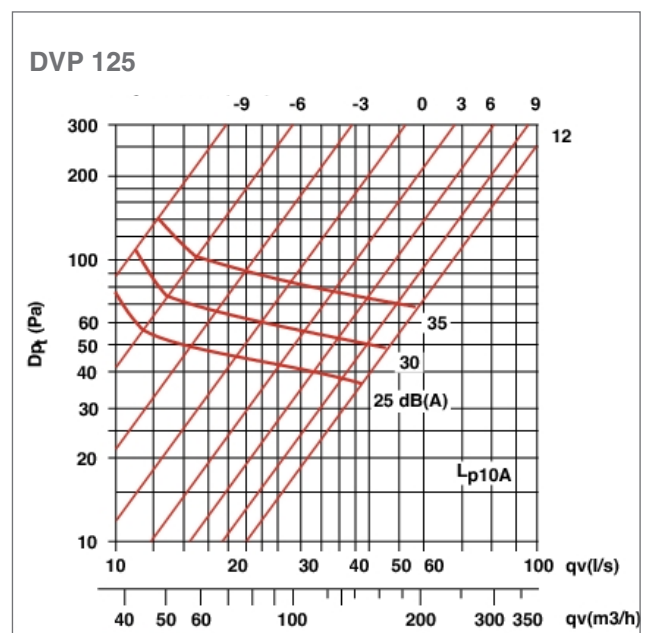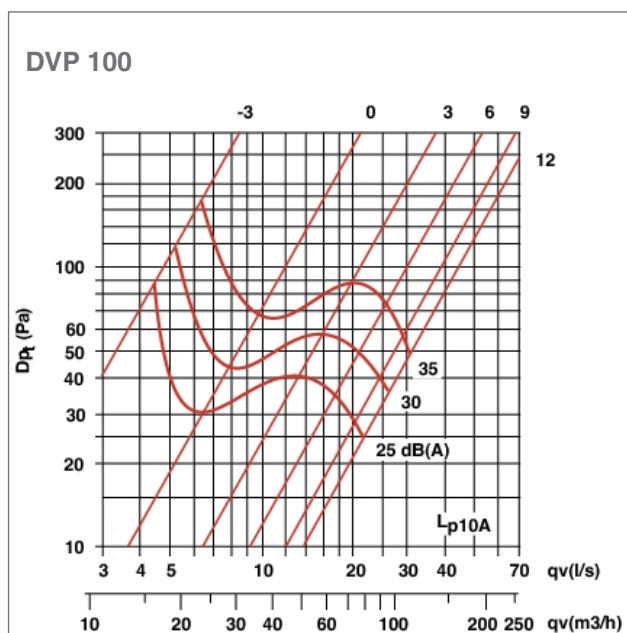

10

NORDdiffuser | DVP

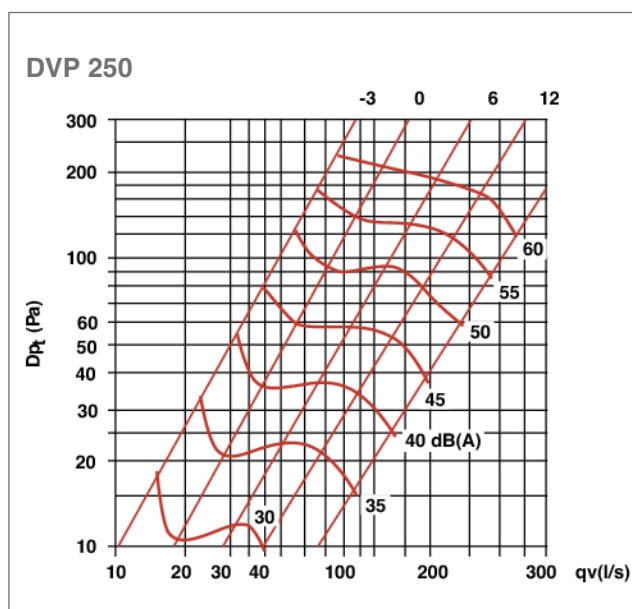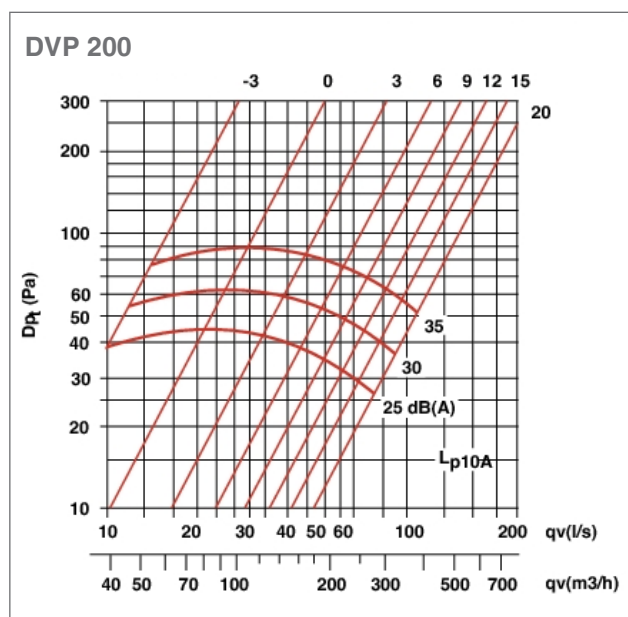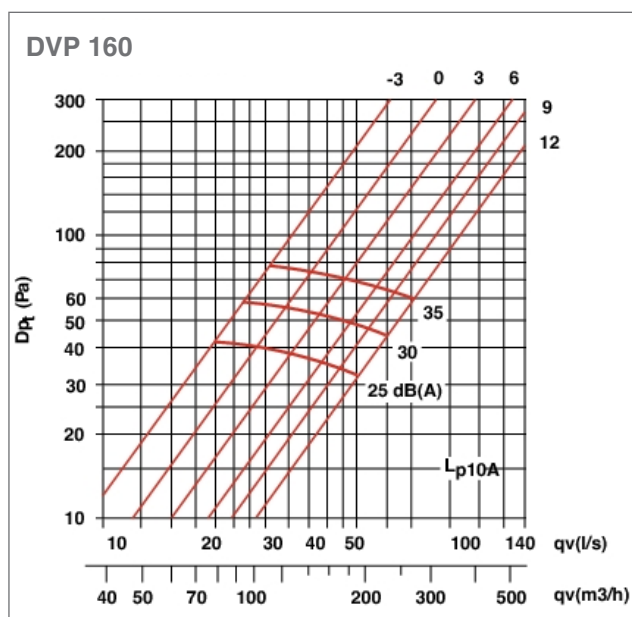

10

NORDdiffuser | DVP

### Product codes

|         |          |
|---------|----------|
| DVP     | Ød       |
| Product | Diameter |

Example: DVP 200

## Installation

Installation to duct using a mounting frame (included).

## Measurement and regulation of air flow

Measurement of air flow through pressure differential measured with a separate measuring device.

Regulation by opening or closing by turning the plate.

| K-value |      |      |       |       |       |       |       |       |
|---------|------|------|-------|-------|-------|-------|-------|-------|
| a, mm   | 0    | 3    | 6     | 9     | 12    | 15    | 18    | 21    |
| DVP 100 | 1,45 | 2,50 | 3,10  | 3,95  | 4,10  |       |       |       |
| DVP 125 | 2,50 | 3,65 | 4,40  | 5,45  | 6,40  | 7,45  |       |       |
| DVP 160 | 4,40 | 5,30 | 7,30  | 8,70  | 9,95  | 11,85 |       |       |
| DVP 200 | 4,05 | 6,05 | 8,25  | 10,25 | 12,00 | 15,30 | 17,45 |       |
| DVP 250 | 6,15 | 8,90 | 10,90 | 12,95 | 15,25 | 18,05 | 20,75 | 23,85 |

